User Guide Industrial sewing machine

Thank you for purchasing our products.

For your use safety, please must read the instruction manual before use.

 Λ

1 2 3

4

R

7

6

8 9

10 a

a b c d

e 11


12 13


14


15


℃ ℃




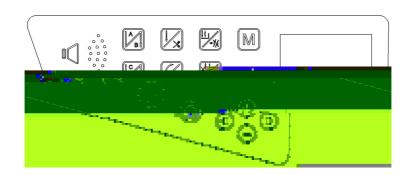

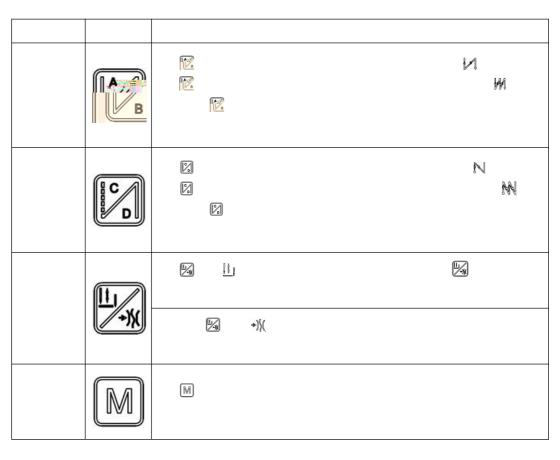

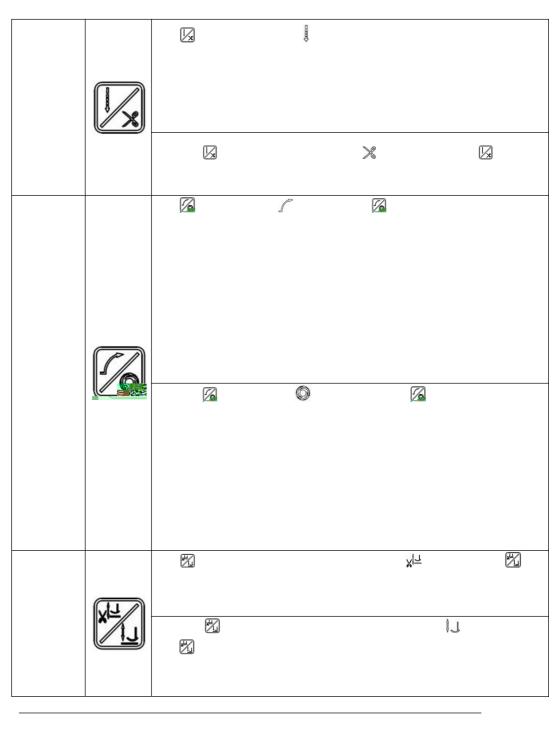

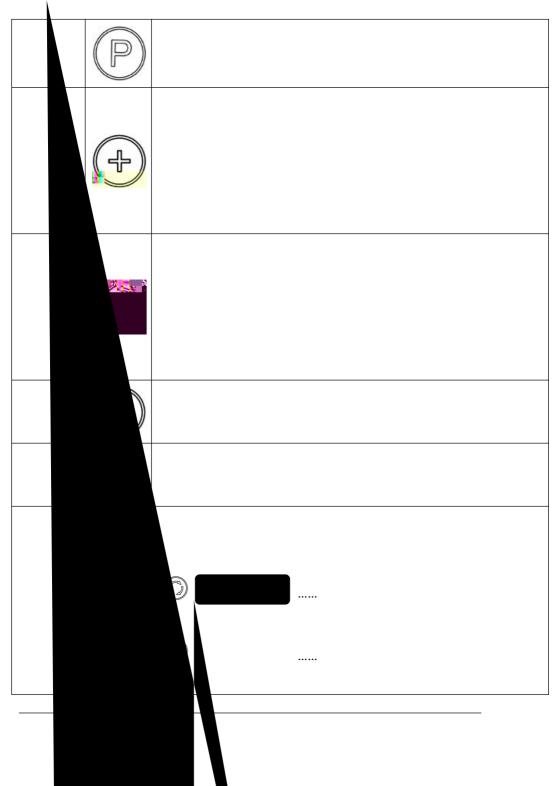

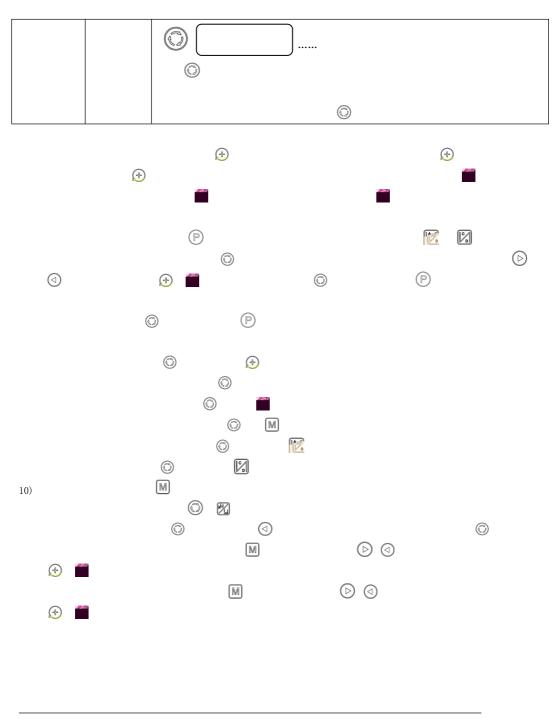

Parameter code	Corresponding content	range	Factory setting	Content instruction and memo
001. H		150	3500	
002. PSL		1	90	
003. NUD		UP/DN	DN	
004. N		150	1800	
005. V		150	1800	
006. B		150	1800	
007. S		150	800	
008. SLS		0	2	
009. A		300	3000	
010. ACD		OFF/ON	ON	

011. RVM	JUK/BRO	JUK	
012. SMS	A/M	A	
		CON	
	0 10	2	
	1	2	
	1		
	17		
020. SME	A/M	A	

	1	2	
	1	8	
	9		
030. BCC			
033. BRC	0 359	0	
034. PZ0			
035. BT5	1	8	BT5, BT6 = 0 BT5, BT6 = 1
036. BT6	17	6	BT5, BT6 = 17
037.	A/M	М	

038. PM			
039. PS			
040. WON	0 6	3	,
041. TM	0/1/10/100	0	
042. PSM	OFF/ON	ON	
043. FTM	OFF/ON	ON	
044. PN	0	0	

045. SSS	OFF/ON	0FF	

range

CW/CCW

Factory

setting

CW

6

Content instruction and memo

Parameter

code

046. DIR

Corresponding content

^₩		

Q

059. T	120	300
060. L	120	200
061. F0	0	250

068. T2	0	240	
069. M	150	950	
070. NC	0	0	
Sweep mode			
071. W1	0	5	
072. W2	0	50	
Grab line mode			
071. W1			
072. W2	0	50	
073. WF	0	30	
074. FHT	1	30	
075. UEG	5	60	
076. DRU		165	

077. ANU	OFF/ON	ON	
078. URU		0	
079. ERR	0	0	

Error code	Code Content	The possible problem	The way to solve
ERR 00		2	
ERR 01			
PWROFF			
ERR 03		3. The oil level is below normal.	Check whether the oil quantity is up to the normal value.
ERR 04		1	
ERR 05			

ERR 06		
ERR 07		,

